

GRACE

GRACE is a durable, multi-purpose homogeneous vinyl flooring with non-directional designs. It is an ideal solution for heavy traffic areas such as healthcare, education, cleanroom, retail and public building. GRACE has a surface treated with PUR reinforcement, which means no wax and no polish for life and excellent life cycles costs. The PUR also provides a good base for future maintenance procedures.

INSTALLATION

GRACE homogeneous vinyl should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by our technical department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using the matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

TECHNICAL DATA

DESCRIPTION			
Total thickness	EN 428	mm	2.0mm
Wearlayer thickness	EN 429	mm	2.0mm
weight	EN 430	g/m ²	3200g/m ²
Roll width	EN 426	cm	200cm
Roll length	EN 426	m	20m
CLASSIFICATION			
Classification	EN 685	class	34-43
Fire rating	EN 13 501-1	--	Class B ₁ -S1
	GB 8624-2006	--	GB 8624 B1
Toxic testing	GB 18586-2001	--	Pass
Electrical resistance	EN 1815	kv	< 2
	EN 1081	Ω	≥10 ⁹
Slip resistance dry	EN 13893	--	≥0.3
Slip resistance wet	DIN 51130	class	R10
PERFORMANCE			
Abrasion group	EN 649	--	Group T
Dimensional stability	EN 434	%	≤0.40
Residual indentation	EN 433	mm	0.03
Thermal conductivity	EN 12 524	W/(m.K)	0.25
Colour fastness	EN ISO 105 - B02	degree	≥6
Chemical resistance	EN 423	--	Good
Castor wheel test	EN 425	--	Suitable
Impact sound reduction	EN ISO 717/2	dB	Approx.+4
Flexibility	EN 435	--	Excellent
Anti-bacterial and fungicidal	MRSA	--	Good
	DIN EN ISO 846 -A/C	--	Good
Surface treatment			PUR
Underfloor heating		°C	Suitable max.28
CE MARKING			
CE	EN 14041		



Homogeneous Vinyl

GRACE

Topflor



GRACE

Homogeneous Vinyl



- > Healthcare
- > Education
- > Offices
- > Retail
- > Public building



Topflor

The ultimate flooring
The ultimate performance

GRACE



1001 Stone



1002 Beige



1006 White



1005 Sand



1004 Sunflower




1003 Amber



1010 Shell



1009 Clay

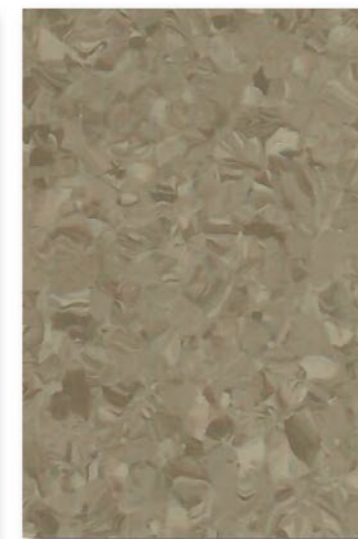


1008 Truffle




1007 Carmine


GRACE

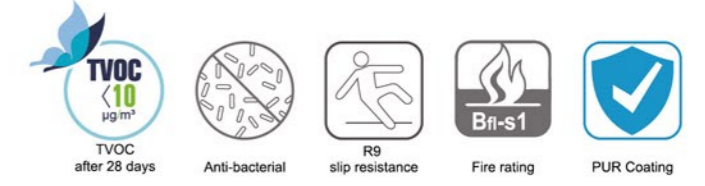

1011 Light Blue

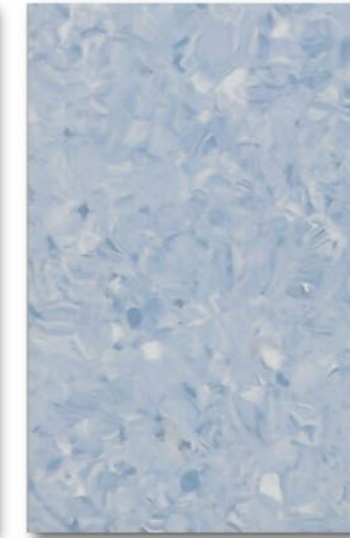

1012 Blueberry

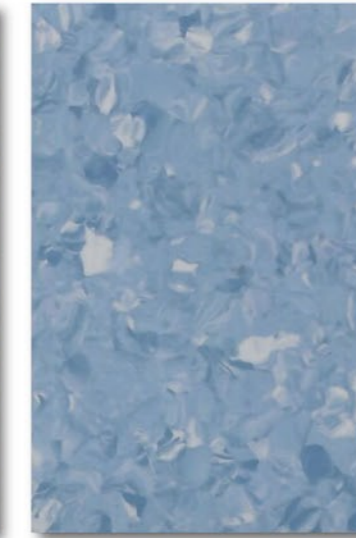

1013 Royal Blue




1014 Pacific



1015 Mist



1016 Silver Grey

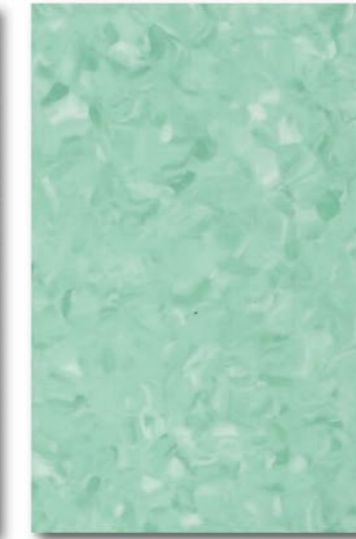

1017 Jade



1018 Olive



1019 Smog



1020 Smoke



1021 Basalt



1022 Ash