

TOP3000



TOP3000 is a homogeneous vinyl flooring suitable for most heavy traffic areas such as healthcare, education, retail and industry. TOP3000 is available in 19 colors and made of high quality raw materials. It receives a PUR surface treatment for protection and easy maintenance. The PUR also provides a better base for future maintenance.

INSTALLATION

TOP3000 homogeneous vinyl should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by our technical department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All joints must be heat welded using the matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The flooring should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

TECHNICAL DATA

DESCRIPTION			
Total thickness	EN 428	mm	2.0mm
Wearlayer thickness	EN 429	mm	2.0mm
Weight	EN 430	g/m ²	330g/m ²
Width	EN 426	cm	200cm
Length of sheet	EN 425	m	20m

CLASSIFICATION			
Classification	EN 685	class	34-43
Fire rating	NF P 93-106	—	M2
	EN 13501-1	—	Class BFS1
	DIN 4102	—	B1
	GB 8624-1997	—	GB 8624 B1
Toxic testing	GB 18586-2001	—	Pass
Electrical resistance	EN 1815	kV	< 2
Slip resistance dry	EN 13893	CS	> 0.07
Slip resistance wet	EN 13893	—	> 0.3
	DIN EN 13893	—	R9


PERFORMANCE			
Adhesion resistance	EN 649	—	Group P
Dimensional stability	EN 434	%	≤ 0.40
Flexural resistance	EN 433	mm	≥ 0.08
Thermal resistance	EN 3287	mK/W	≤ 0.01
Colour fastness	EN ISO 105-B02	Shades	≥ 6
Chemical resistance	EN 422	—	stable
Castor wheel test	EN 425	—	stable
Impact sound absorption	EN ISO 1712	dB	≥ 19
Flexibility	EN 435	—	excellent
Spillage treatment	WMSL	—	very good
Surface treatment	DIN EN ISO 846-A-C	—	Good
Surface treatment	—	—	PUR
Underfoot heating	—	—	variable max. 28
Maintenance usage	IMO RES A B3 (B3) IMO MSC 61 (C7) Annex 1 Part 2.5	—	—

CE MARKING	
EN 14041	

Homogeneous Vinyl

TOP3000

Topflor

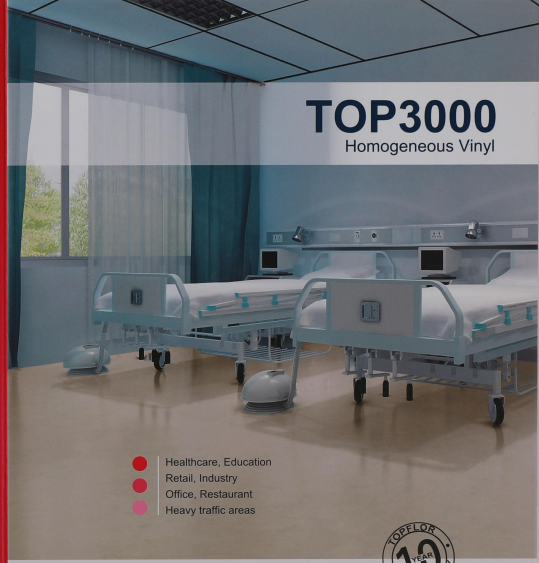

TOP3000

Homogeneous Vinyl


- Healthcare, Education
- Retail, Industry
- Office, Restaurant
- Heavy traffic areas



The ultimate flooring. The ultimate performance.

TOP3000

● 2.0mm(T) X 2.0m(W) X 20m(L)

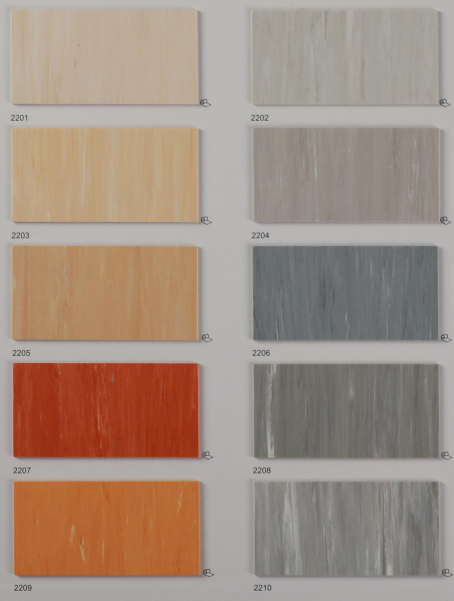

TOP3000

● 2.0mm(T) X 2.0m(W) X 20m(L)

